450 GALLON CHLORINATOR TANK

SPECIFICATIONS:

- CONCRETE STRENGTH: 4000 PSI MIN. @ 28 DAYS
- REINFORCING CONFORMS TO ASTM A615 & A185
- DESIGN: MAXIMUM EARTH COVER IS 4'-0"; NO TRAFFIC LOADS
- 1" BUTYL RUBBER GASKET PROVIDED FOR JOINT
- APPROXIMATE WEIGHT: TANK - 2.15 TONS
  LID - 0.91 TONS

M&W PRECAST & CONSTRUCTION SUPPLY
A Division of Wehrung's

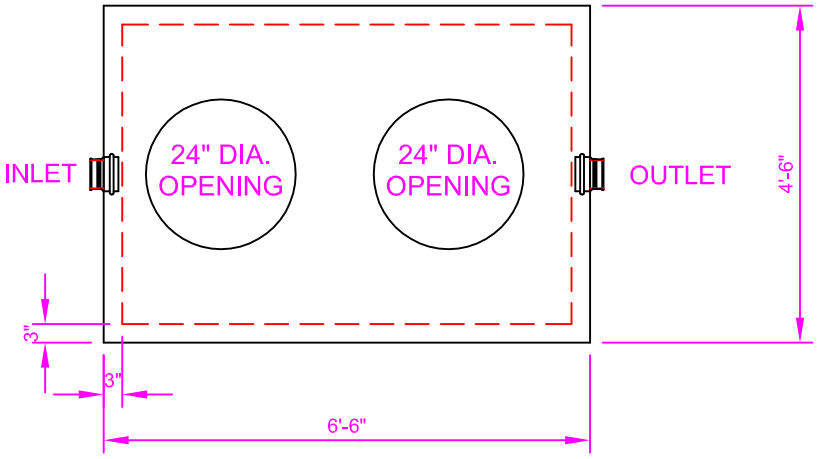

PLAN VIEW

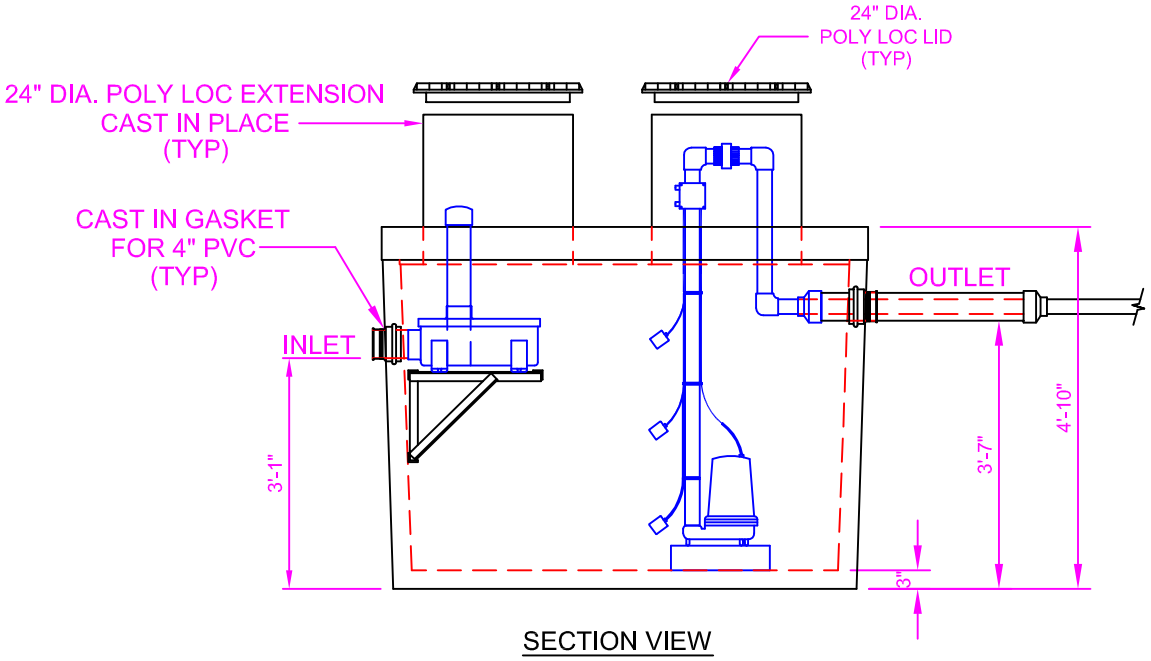

SECTION VIEW

208 Durham Road, Ottsville, PA 18942
(610) 847-7203 F (610) 847-1046

9/2014